


RSHC156P

156 N型多晶电池片

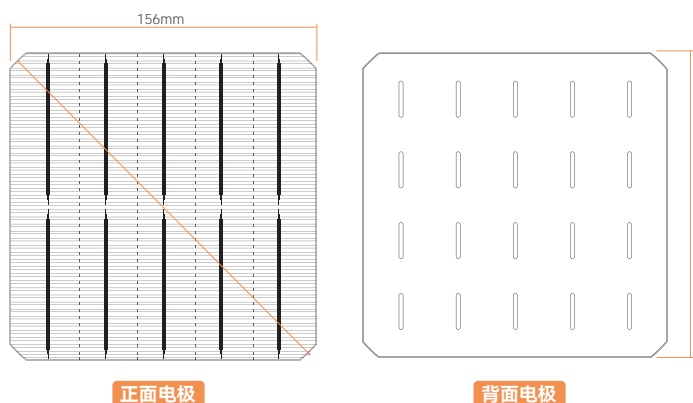

产品特征

- 尺寸规格** 156mmx156mm±0.5mm
- 电池厚度** 180±20um
- 电池正面** 主栅5根, 蓝色减反射膜
- 电池背面** 主栅5根, 蓝色减反射膜



高转换效率, 正面效率 $\geq 25\%$



双面率 $\geq 80\%$



光致衰减为0



优越的抗PID性能



功率温度系数低至 $-0.30\%/K$



弱光效应好




封装损失更低, 更适合高效组件




档位 (Eff)	功率 (Pmpp)	最大功率电压 (Umpp)	最大功率电流 (Impp)	开路电压 (Uoc)	短路电流 (Isc)	填充因子 (FF)
18.90%	4.64	0.547	8.50	0.641	8.99	80.62
18.80%	4.62	0.545	8.48	0.640	8.98	80.52
18.70%	4.59	0.544	8.47	0.639	8.96	80.43
18.60%	4.57	0.542	8.45	0.637	8.95	80.35
18.50%	4.55	0.541	8.43	0.636	8.93	80.25
18.40%	4.52	0.539	8.41	0.634	8.91	80.23
18.30%	4.50	0.538	8.39	0.633	8.89	80.16
18.20%	4.47	0.536	8.37	0.631	8.87	80.08
18.10%	4.45	0.535	8.34	0.630	8.86	79.82
18.00%	4.43	0.533	8.32	0.628	8.84	79.68

IV曲线

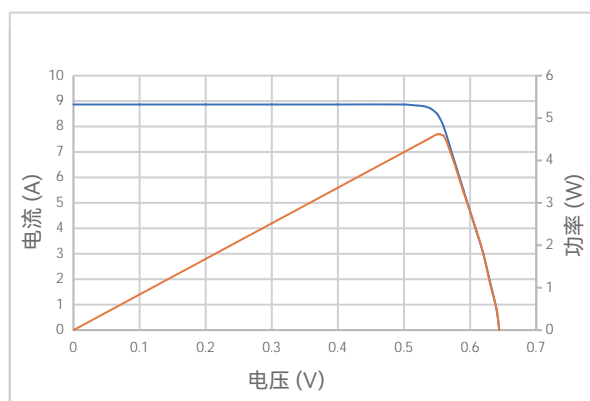

光谱响应

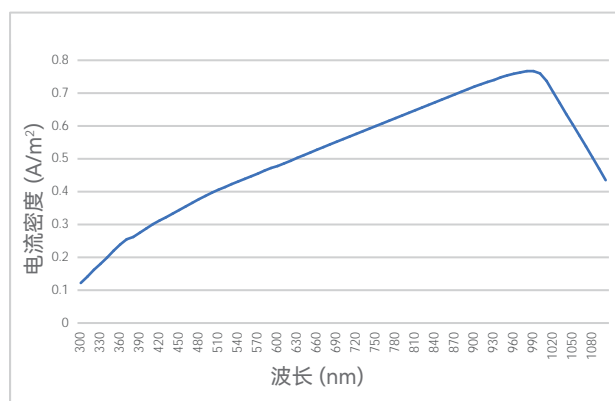

温度系数

电流温度系数	+0.06%/K
电压温度系数	-0.37%/K
功率温度系数	-0.36%/K

产品包装

每托30箱、每箱16包、每包120片